


9. Declared performance

Essential Characteristics	Performance	Harmonized Testing Procedure	Remarks
Gloss	[20°] - 0,4 gloss [60°] - 3,8 gloss [85°] - 32,3 gloss	TS 4318 EN ISO 2813 / LYST06	
Density (23°C)	1,153 g/ml	23 ° C TS EN ISO 2811-1 / LYST07	
Lead (Pb)	14,7 mg / kg	Atomic absorption spectrometer	

Where pursuant to Article 37 or 38 the Specific Technical Documentation has been used, the requirements with which the product complies: **Non applicable**

10. The performance of the product set out in numbers 1 and 2 corresponds to the declared performance set out in number 9. This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:
Tuluğ Kaya
Plant Manager

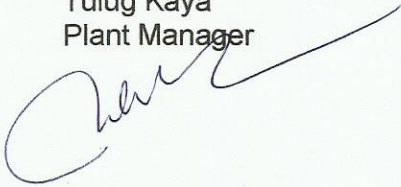

E.Engin Gokler
General Manager

DBS
İNŞ.TAAH.KİM.SAN.ve TIC.İTD.ŞTİ.
Ataycesme Mah.Bağcı Çarşısı Sk.
Demirözü A Blok No:6 Dük.1 M.Şişli/İST
Küçükçekirce Mah. No: 2711003



Date : 26.06.2013